


LED Panel Light with Sensor

595*595*35mm / 295*1195*35mm

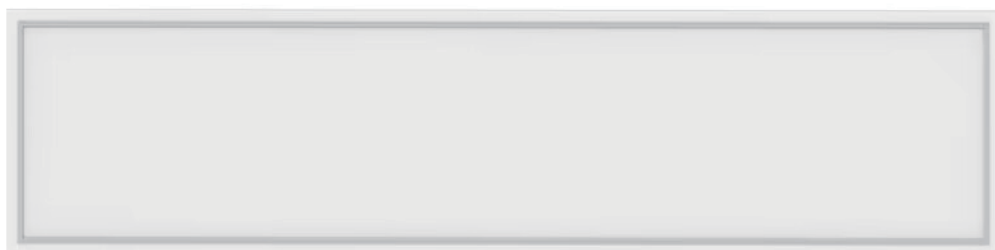

Features:

- *Super slim and efficient design
- *High light efficient and energy saving
- *Special heat treatment & Long life-span
- *Environmental friendly

Certificates:



Technical Specification

595*595*35mm

| Item | UL-PL6060-14W-TC | UL-PL6060-16W-TC | UL-PL6060-22W-TC | UL-PL6060-24W-TC |
|------------------|----------------------|------------------|------------------|------------------|
| Power | 14W | 16W | 22W | 24W |
| Lumen (±10%) | 2100 LM | 2400 LM | 3300 LM | 3600 LM |
| Lumen Efficiency | 150LM/W | | | |
| Voltage | AC220-240V ~ 50/60Hz | | | |
| CCT | 4000K / 5000K | | | |
| PF | >0.9 | | | |
| CRI | Ra > 80 | | | |
| Beam Angle | 120° | | | |
| Sensor | Motion sensing | | | |
| IP Rank | IP20 | | | |
| Size (mm) | 595*595*35mm | | | |
| Material | AL+PS | | | |

Packing information

| Model No | Package | Size (MM) | QTY/PCS | Carton GW(KG) |
|------------------|----------|-------------|---------|---------------|
| UL-PL6060-14W-TC | Box size | 620*255*625 | 6 | 10 |
| UL-PL6060-16W-TC | | | | |
| UL-PL6060-22W-TC | | | | |
| UL-PL6060-24W-TC | | | | |

Technical Specification

1195X295X35mm

| Item | UL-PL30120-14W-TC | UL-PL30120-16W-TC | UL-PL30120-22W-TC | UL-PL30120-24W-TC |
|------------------|----------------------|-------------------|-------------------|-------------------|
| Power | 14W | 16W | 22W | 24W |
| Lumen (±10%) | 2100 LM | 2400 LM | 3300 LM | 3600 LM |
| Lumen Efficiency | 150LM/W | | | |
| Voltage | AC220-240V ~ 50/60Hz | | | |
| CCT | 4000K / 5000K | | | |
| PF | >0.9 | | | |
| CRI | Ra > 80 | | | |
| Beam Angle | 120° | | | |
| Sensor | Motion sensing | | | |
| IP Rank | IP20 | | | |
| Size (mm) | 595*595*35mm | | | |
| Material | AL+PS | | | |

Packing information

| Model No | Package | Size (MM) | QTY/PCS | Carton GW(KG) |
|-------------------|----------|--------------|---------|---------------|
| UL-PL30120-14W-TC | Box size | 1220*255*325 | 6 | 10.5 |
| UL-PL30120-16W-TC | | | | |
| UL-PL30120-22W-TC | | | | |
| UL-PL30120-24W-TC | | | | |
| UL-PL30120-36W-TC | | | | |
| UL-PL30120-40W-TC | | | | |

Application


This product is suitable for office, hall, family, hotel, conference room, factory or office, commercial use, residential or public facilities, school, hospital lights.



Dimension (Unit : mm)

Notes

- 1 . All dimension units are millimeters.
- 2 . All dimension to larence is $\pm 0.5\text{mm}$ unless otherwise noted.

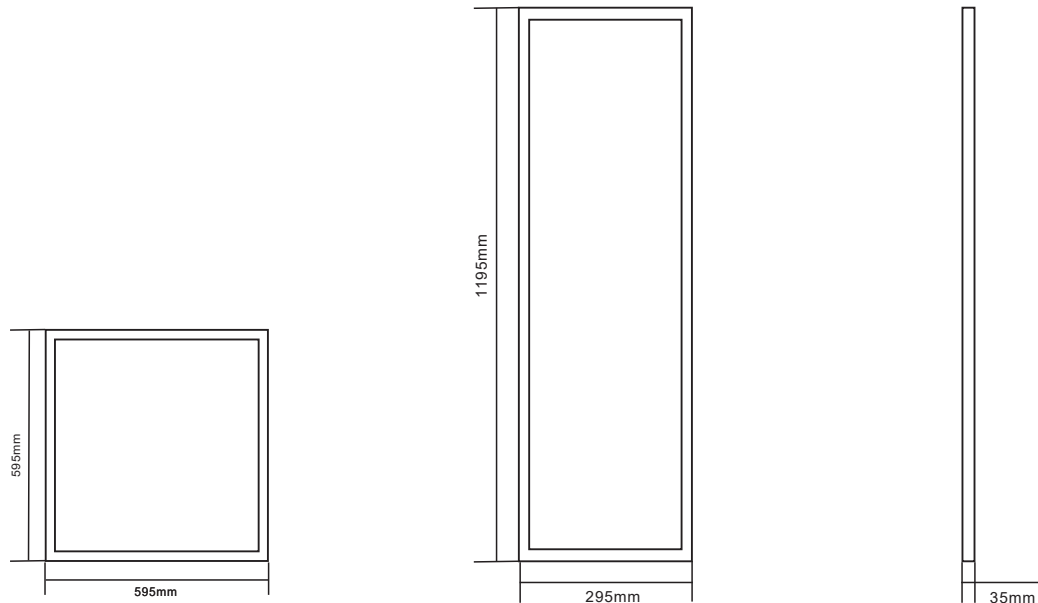







Safety Information

- 1 . Please make sure cut off the power before installation.
- 2 . Please take care of water,electric shock and vibration.
- 3 . Please use the panel with standard working voltage,any other voltage is not allowed.
- 4 . Indoor use only.
- 5 . Please read this manual carefully before using.




Installation

1.Recessed/Bult-in.Don't need any spare parts(Most Popular).

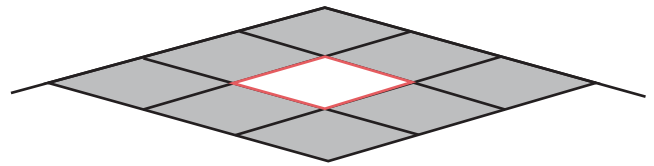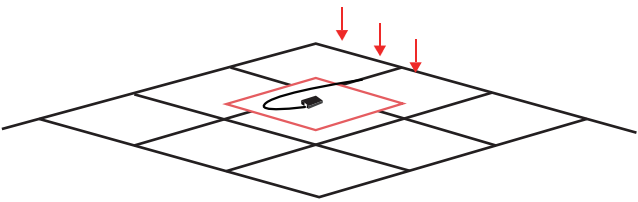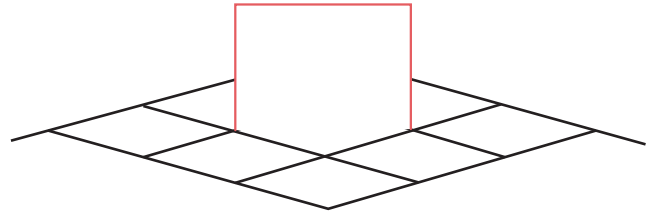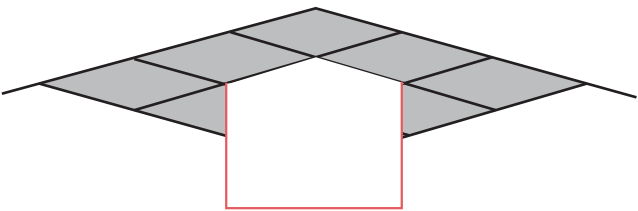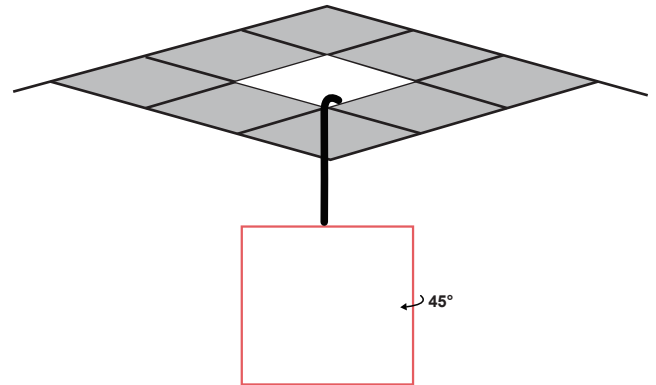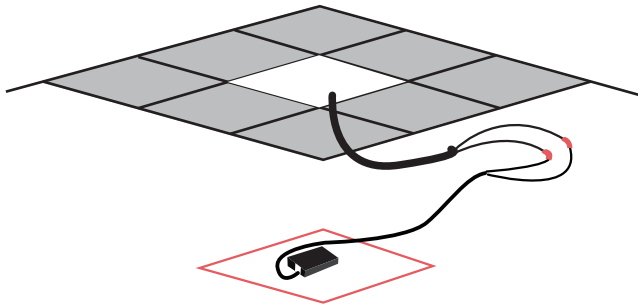

Dimmer switch

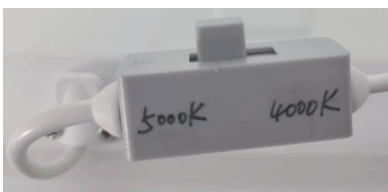

Warning

- *Please use the product within the specified Voltage range.
- *Make sure power is switch off before installation.
- *Ensure that the correct installation steps are followed.
- *Installation to be done by a qualified electrician.
- *If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- *The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
- *The minimum clearance distance from the all sides of the luminaire to any normally flammable building element or building insulation is 10cm.

WARNING - RISK OF OVERHEATING OR FIRE IF THE CLEARANCE DISTANCES ARE COMPROMISED. THIS LUMINAIRE IS NOT SUITABLE FOR INSTALLATION IN LOCATIONS WHERE THERMAL INSULATION IS PRESENT, OR MAY REASONABLY BE EXPECTED TO BE INSTALLED IN THE FUTURE, OR WHERE THERE IS A LIKELIHOOD OF OTHER COMBUSTIBLE MATERIAL, E.G. LEAVES OR VERMIN DEBRIS, ETC. COLLECTING ON OR AROUND THE LUMINAIRE. IT IS NOT SUITABLE FOR DOMESTIC INSTALLATIONS OR INSTALLATION IN RESIDENTIAL AREAS OF NON-DOMESTIC INSTALLATIONS (RESIDENTIAL INSTITUTIONS, HOTELS, BOARDING HOUSES, HOSPITALS, ACCOMMODATION HOUSES, MOTELS, HOSTELS AND THE LIKE).

