



# Programable IR Remote Controller User Manual

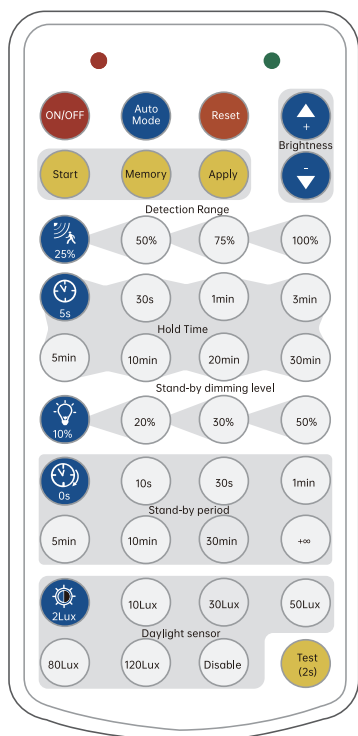

Key	Function	Performance
	ON/OFF	<ol style="list-style-type: none"> <li>1. Switch ON/OFF the light.</li> <li>2. Turn on the light as permanent on without sensor mode.</li> </ol>
	Auto Mode	Switch to sensor mode and all sensor settings will recovery to the latest setting.
	Reset	Reset the sensor to default mode: 100% brightness, hold time 5min, stand-by period +∞, 100% sensitivity, daylight sensor diasable.
	+/- Brightness	<ol style="list-style-type: none"> <li>1. To adjust brightness 20%-100% in on/off mode.</li> <li>2. To adjust highest brightenss 60%-100% in sensor mode.</li> </ol>
	Program Mode	Press "Start" to customize scene, users can change detection range, daylight threshold, holdtime, standby dimming level and standby period.
	Save Setting	<ol style="list-style-type: none"> <li>1. Press "Memory" to save all the settings.</li> <li>2. The settings remained as the last time if not get resetted values.</li> </ol>
	One Key Apply	<ol style="list-style-type: none"> <li>1. Press "Apply" to deliver the saved setting.</li> <li>2. Press "Apply" without "memory" will make all the setting one-time operation.</li> <li>3. Settings should be done within 30S, otherwise it exits memory mode.</li> </ol>
	Detection Range	Detection range (Press to define detection area 100%/75%/50%/25%)
	Hold time	Hold time (Press to define holdtime 5s/30s/1min/3min /5min/10min/20min/30min)
	Stand-by dimming level	Stand-by dimming level (Press to define stand-by dimming level 10%/20%/30%/50%.)
	Stand-by period	Stand-by period (Press to define stand-by period 0s/10s/30s/1min/5min/10min/30min/+∞.) Note: "0s" means no standby period; "+∞" means unlimited standby period.
	Daylight threshold	Daylight threshold (Press to define daylight level 2Lux/10Lux/30Lux/50Lux/80Lux/120Lux/Disable.) Note: Disable means light will be turned on once sensor detects motion no matter what ambient lux.
	Test Mode	Sensor turn to test mode: The light will flash 3 times in 5s, after 5s sensor quit the test mode and resume to the latest setting.

Size (L\*W\*H): 116.5\*55\*13mm  
Please use two AAA batteries

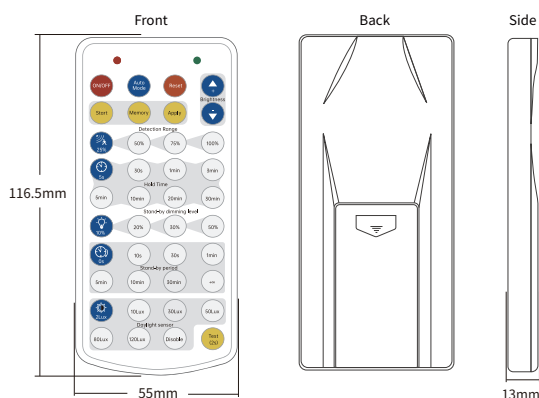

## Sensor Setting (Test sensor and single sensor setting) :

1. Press ON/OFF button to turn on the sensor.
2. Press Reset or Auto Mode turn to sensor mode.
3. Select the parameters in the function area ( Detection range/Hold time/Standby dimming level/Standby period/Daylight threshold)
4. When press any button, the light will flash one time, means setting was saved and done.

## Programmable and One Key Commission:

1. Prss ON/OFF button to turn on the sensor.
2. Press Reset or Auto Mode turn to sensor mode.
3. Press the “Start” button to start program your settings.
4. Select the parameters in the function area ( Detection range/Hold time/Standby dimming level/Standby period/Daylight threshold)
5. After finish step 4, press the “Memory” button to save the settings.
6. Press “Apply” to send the settings to sensor (when press “Apply”, the green light will flash)
7. Use the “Apply” button can set mass sensors in one time

## Press Dim:

1. Prss ON/OFF button to turn on the sensor.
2. Press Brightness+/Brightness- can dim up or dim down the light, dimming level is 20%-100% in no sensor mode.
3. Press Reset or Auto Mode turn into sensor mode, press Brightness+/Brightness- dim up or dim down the light, diming level is 60%-100% when in sensor mode.
4. Long press the Brightness+ and hold for 3S, to turn the light to 100% no matter in sensor mode or On/OFF (no sensor) mode.

## Manual dimming:

1. ON/OFF button to turn on the light
2. Press +/- Buttons on the right top corner to manually dim up or dim down the light.
3. Press Test(2s) button to test if the sensor has been well connected; it will keep light ON for 2s only.

## Trouble Shooting:

Q: No response when press any buttons.

A: Please check if the battery was installed correctly and if battery power enough, change the batteries.

Q: Sensor settings can not save after power on/off.

A: Please don't press the ON/OFF button to turn off the light after setting, just switch power off.