


Tri-proof Light-C


0.6m/1.2m/1.5m






Certificates



Application

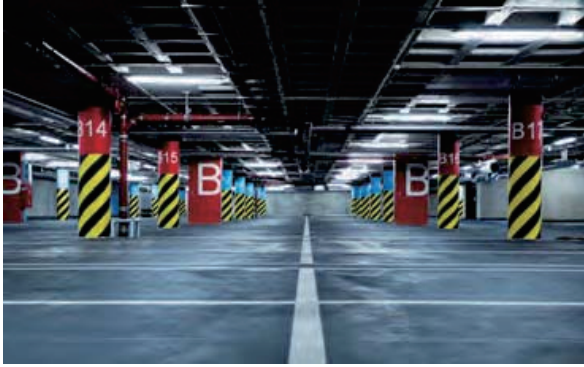

Dimension (Unit: mm)

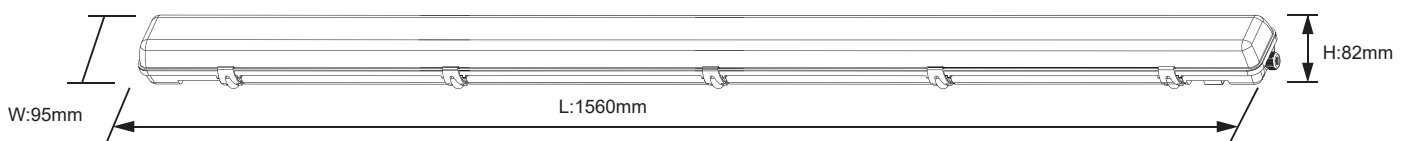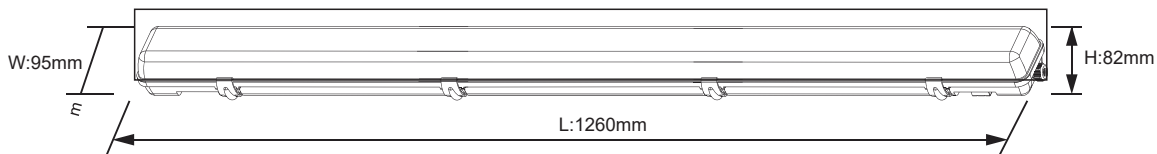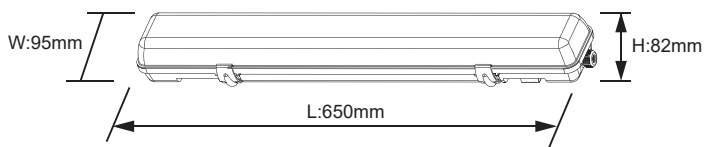

Technical Specification (0.6m)

Item	UL-TRI-18W-C-CCT
Lumen	2340lm
Size(mm)	650*95*82mm
Voltage	AC220-240~50/60Hz
Lumen Efficiency	130lm/W
LED Type	SMD 2835
Beam Angle	120°
PF	>0.9
CRI	Ra>80
IP Rank	IP65
Material	PC

Technical Specification(1.2m)

Item	UL-TRI-20W-C-CCT	UL-TRI-24W-C-CCT	UL-TRI-36W-C-CCT	UL-TRI-40W-C-CCT
Lumen	2600lm	3120lm	4680lm	5200lm
Size(mm)	1260*95*82mm	1260*95*82mm	1260*95*82mm	1260*95*82mm
Voltage	AC220-240~50/60Hz			
Lumen Efficiency	130lm/W			
LED Type	SMD 2835			
Beam Angle	120°			
PF	>0.9			
CRI	Ra>80			
IP Rank	IP65			
Material	PC			

Technical Specification (1.5m)

Item	UL-TRI-50W-C-CCT	UL-TRI-54W-C-CCT
Lumen	6500lm	7020lm
Size(mm)	1560*95*82mm	1560*95*82mm
Voltage	AC220-240~50/60Hz	
Lumen Efficiency	130lm/W	
LED Type	SMD 2835	
Beam Angle	120°	
PF	>0.9	
CRI	Ra>80	
IP Rank	IP65	
Material	PC	

LED MANUAL INSTRUCTION


Safety Notice:

- ① Installation should be done by registered electricians.
- ② Before replacing the driver, please switch off the power supply and wait until it cools down completely.
- ③ Never touch the working luminaire
- ④ In any case of malfunction, switch off the power supply immediately, and do not try to repair it yourself.
- ⑤ Repairment should only be done by registered electricians or official service agent.


Include



Not Include



Model	Power	Fixing Hole Centre
UL-TRI-18W-C	12W	300mm
UL-TRI-24W-C	24W	800mm
UL-TRI-36W-C	36W	800mm




WARNING


Switch off the power supply before installation




1. Drill a $\varnothing 6\text{mm}$ hole




3. Fix the luminaire with the brackets

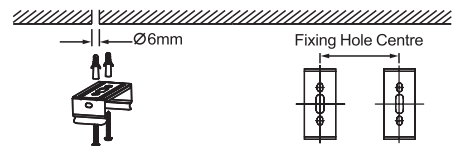


2. According to the Fixing hole centre, install expansion bolts and screws, install the bracket.




4. Finish installation




1. Unbuckle the clips




2. Take out of the diffuser




3. Push down the U brackets




4. Take out of the LED module

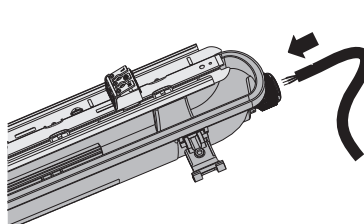


5. Insert the cable through the cable gland

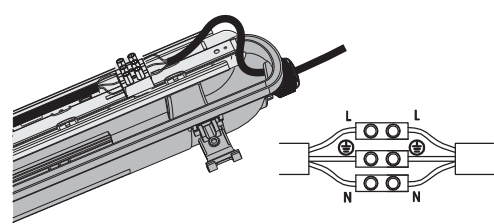


6. Connect the wires, L to L, N to N, \oplus to \oplus

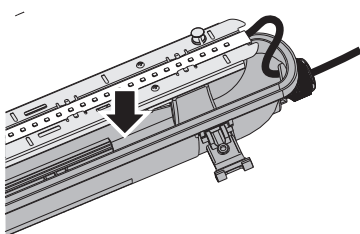

7. Put back the LED module

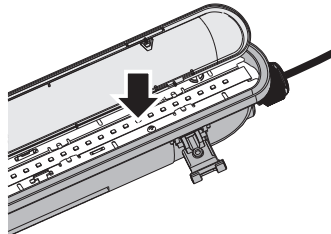

8. Close the luminaire

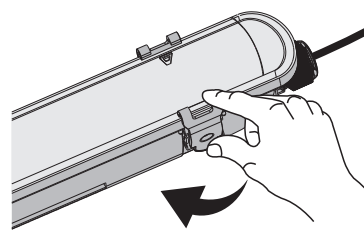

9. Buckle the clips

WARNING

Switch off the power supply before installation

