


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.0V I:0.1131A P:25.74W PF:0.9485 Lamp Flux:3683.99x1 lm		
NAME: LED Tri-proof Light	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.: Ulledlighting	SUR.:N/A	Shielding Angle:N/A

DATA OF LAMP		PHOTOMETRIC DATA Eff: 143.12 lm/W			
MODEL	R2DG200703801-10	Imax(cd)	1033	S/MH(C0/180)	1.25
NOMINAL POWER(W)	24	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3684.0	η UP,DN(C0-180)	4.8,45.1
NOMINAL FLUX(lm)	3683.99	CIE CLASS	DIRECT	η UP,DN(C180-360)	4.9,45.2
LAMPS INSIDE	1	η up(%)	9.7	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	240	η down(%)	90.3	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

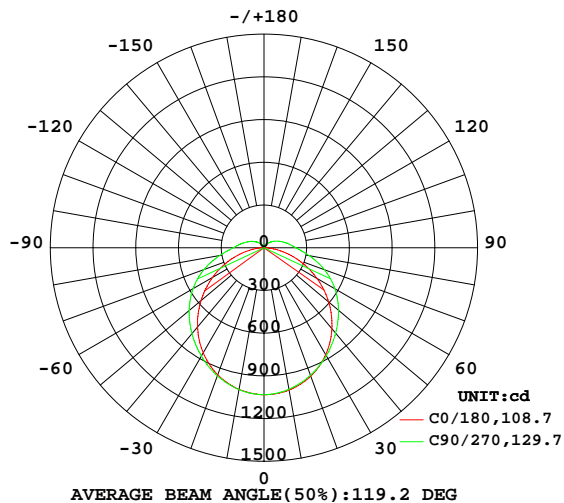

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

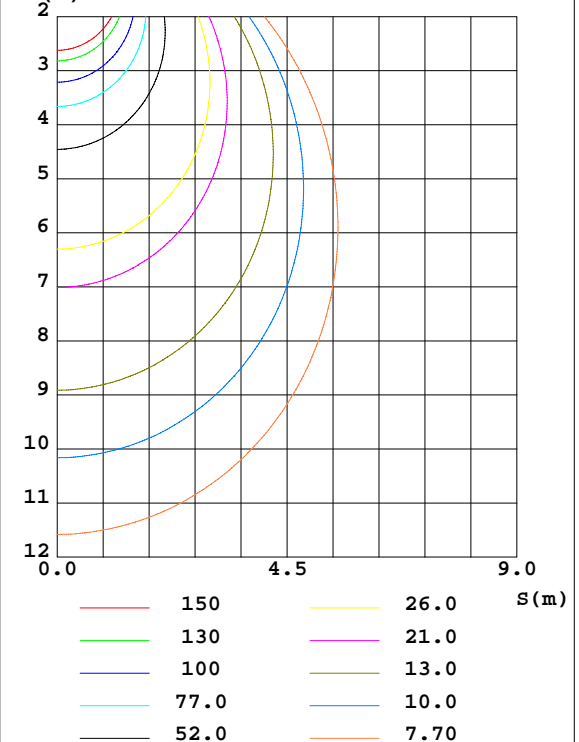

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.0DEG
 Operators: Ben
 Test Date: 2020-07-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity: 48%
 Test Distance: 2.490m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1010	1009	1011	1014	1015	1011	1009	1008	0- 10	97.50	97.50	2.65,2.65
20	949.9	950.0	956.6	959.4	959.9	953.6	953.2	948.9	10- 20	278.4	375.9	10.2,10.2
30	853.5	862.9	879.2	878.1	866.9	869.0	875.4	862.9	20- 30	421.5	797.4	21.6,21.6
40	726.1	755.8	787.0	773.4	742.2	763.2	782.8	757.1	30- 40	511.2	1309	35.5,35.5
50	577.6	635.9	686.0	655.1	593.0	644.4	683.4	639.7	40- 50	541.8	1850	50.2,50.2
60	417.1	510.6	574.6	529.5	429.7	518.3	574.6	516.1	50- 60	515.6	2366	64.2,64.2
70	255.0	379.4	448.5	397.4	262.7	386.5	452.8	387.7	60- 70	438.3	2804	76.1,76.1
80	104.5	247.9	316.3	264.2	106.3	255.0	323.3	260.3	70- 80	322.0	3126	84.9,84.9
90	21.52	155.7	216.3	164.8	22.08	163.0	224.6	165.2	80- 90	201.0	3327	90.3,90.3
100	16.04	113.2	163.5	119.6	16.28	118.6	171.0	120.9	90-100	135.3	3463	94,94
110	7.820	79.64	123.2	84.44	7.996	83.93	129.2	85.49	100-110	94.83	3557	96.6,96.6
120	5.135	52.37	90.25	56.22	5.132	55.89	94.01	57.42	110-120	62.08	3620	98.3,98.3
130	3.201	29.70	61.80	32.59	3.036	32.40	64.21	33.98	120-130	36.63	3656	99.2,99.2
140	2.019	12.12	35.66	14.04	1.691	13.12	37.46	15.51	130-140	18.35	3675	99.7,99.7
150	2.084	3.530	13.84	3.957	1.338	1.977	14.60	4.661	140-150	6.879	3681	99.9,99.9
160	2.345	3.156	3.770	3.126	1.491	1.400	2.267	1.980	150-160	1.721	3683	100,100
170	2.330	2.757	2.977	2.501	1.612	1.451	1.676	1.661	160-170	0.6518	3684	100,100
180	2.032	2.048	1.853	2.085	2.040	2.030	2.067	2.004	170-180	0.1990	3684	100,100
DEG	LUMINOUS INTENSITY:cd Less than 25% Percent = 12.5 %									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Operators:Ben
 Test Date:2020-07-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:48%
 Test Distance:2.490m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.0V I:0.1131A P:25.74W PF:0.9485 Lamp Flux:3683.99x1 lm		
NAME: LED Tri-proof Light	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.: Ulledlighting	SUR.:N/A	Shielding Angle:N/A

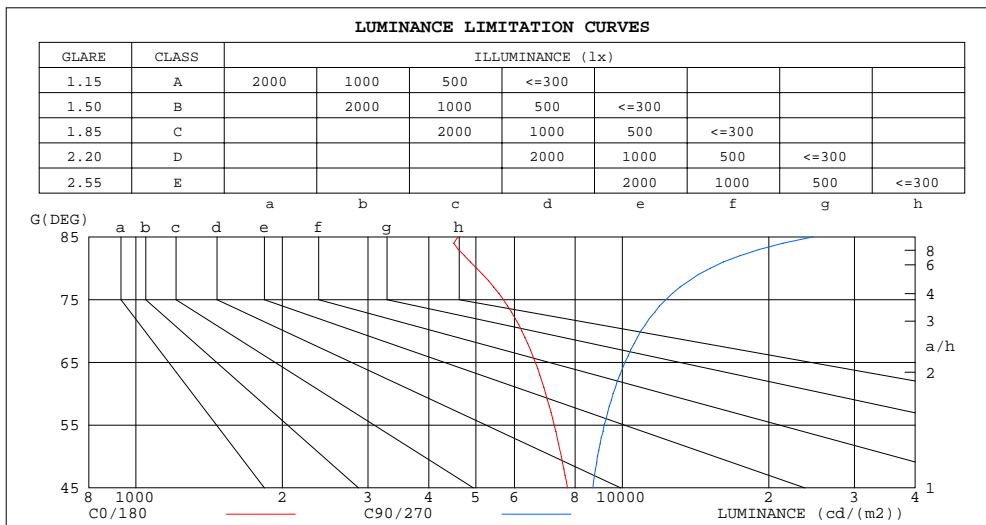

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	4592	24667
80	5016	15173
75	5692	12295
70	6216	10923
65	6624	10126
60	6956	9572
55	7243	9174
50	7493	8889
45	7712	8701


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.0DEG
Operators:Ben
Test Date:2020-07-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
Humidity:48%
Test Distance:2.490m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.0V I:0.1131A P:25.74W PF:0.9485 Lamp Flux:3683.99x1 lm		
NAME: LED Tri-proof Light	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.: Ulledlighting	SUR.:N/A	Shielding Angle:N/A

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.17	1.17	1.17	1.13	1.13	1.13	1.06	1.06	1.06	.99	.99	.99	.93	.93	.93	.90
1.0	.99	.94	.90	.96	.91	.87	.90	.86	.83	.84	.81	.78	.79	.77	.74	.71
2.0	.85	.78	.71	.83	.76	.70	.77	.72	.67	.73	.68	.64	.68	.64	.61	.58
3.0	.74	.66	.59	.72	.64	.57	.68	.61	.55	.63	.58	.53	.60	.55	.51	.48
4.0	.66	.56	.49	.64	.55	.48	.60	.52	.47	.56	.50	.45	.53	.48	.43	.41
5.0	.58	.49	.42	.57	.48	.41	.53	.46	.40	.50	.44	.39	.47	.42	.37	.35
6.0	.52	.43	.36	.51	.42	.36	.48	.40	.35	.45	.39	.34	.43	.37	.33	.30
7.0	.47	.38	.32	.46	.38	.32	.44	.36	.31	.41	.35	.30	.39	.33	.29	.27
8.0	.43	.34	.28	.42	.34	.28	.40	.33	.27	.38	.31	.27	.36	.30	.26	.24
9.0	.39	.31	.25	.39	.31	.25	.37	.30	.25	.35	.28	.24	.33	.27	.23	.21
10.0	.36	.28	.23	.36	.28	.23	.34	.27	.22	.32	.26	.22	.31	.25	.21	.19

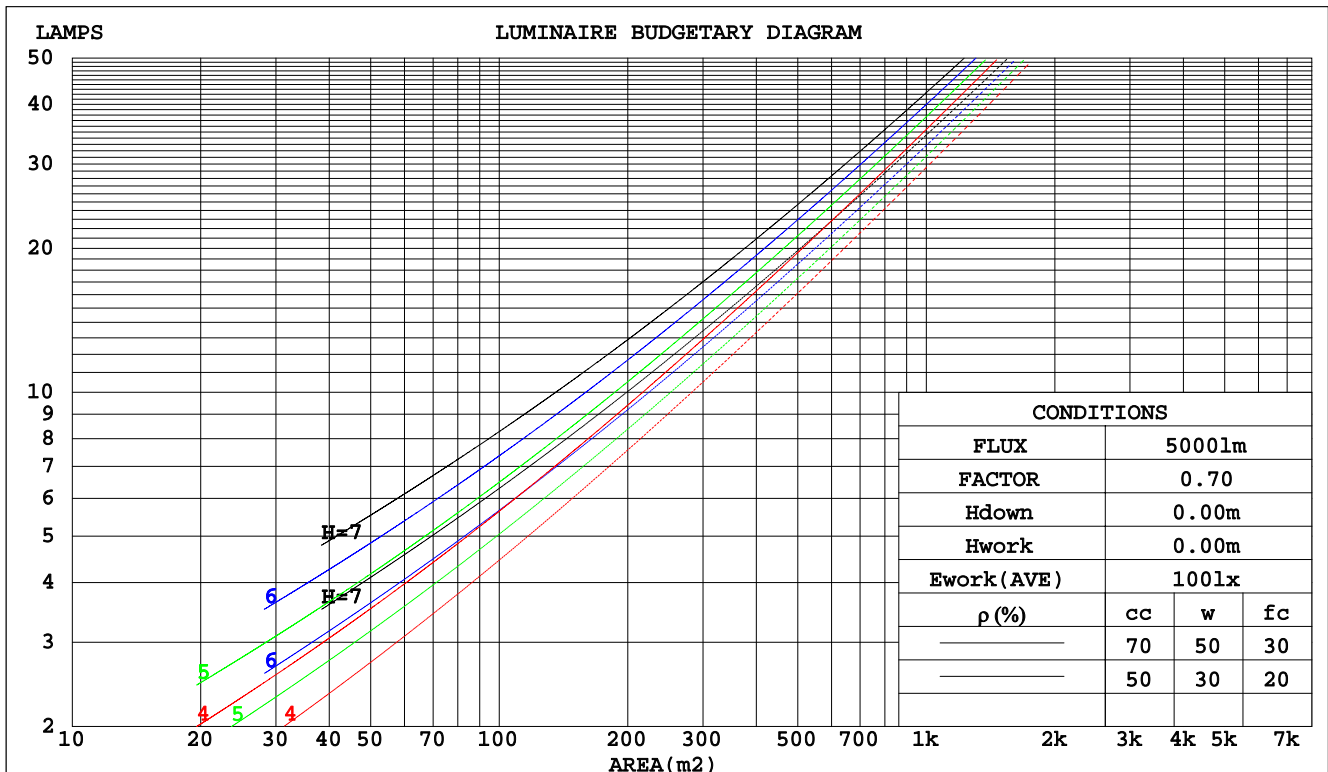

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Operators:Ben
 Test Date:2020-07-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:48%
 Test Distance:2.490m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.0V I:0.1131A P:25.74W PF:0.9485 Lamp Flux:3683.99x1 lm					
NAME: LED Tri-proof Light			TYPE:N/A		WEIGHT:N/A
SPEC.:N/A			DIM.: N/A		SERIAL No.:N/A
MFR.: Ulledlighting			SUR.:N/A		Shielding Angle:N/A

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.358	.204	.065	.348	.199	.063	.329	.189	.060	.312	.180	.058	.296	.171	.055		
2.0	.319	.175	.054	.310	.171	.053	.293	.163	.051	.277	.155	.049	.262	.148	.047		
3.0	.287	.153	.046	.279	.149	.045	.264	.143	.043	.250	.137	.042	.236	.131	.041		
4.0	.261	.135	.040	.253	.133	.039	.240	.127	.038	.227	.122	.037	.215	.117	.036		
5.0	.238	.121	.035	.232	.119	.035	.219	.114	.034	.208	.110	.033	.197	.105	.032		
6.0	.219	.110	.031	.213	.108	.031	.202	.104	.030	.192	.100	.029	.182	.096	.028		
7.0	.203	.100	.028	.197	.098	.028	.187	.095	.027	.178	.091	.027	.169	.088	.026		
8.0	.189	.092	.026	.184	.090	.026	.174	.087	.025	.166	.084	.024	.157	.081	.024		
9.0	.176	.085	.024	.172	.084	.023	.163	.081	.023	.155	.078	.022	.148	.075	.022		
10.0	.165	.079	.022	.161	.078	.022	.153	.075	.021	.146	.072	.021	.139	.070	.020		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.264	.264	.264	.226	.226	.226	.154	.154	.154	.089	.089	.089	.028	.028	.028	
1.0	.258	.230	.205	.221	.197	.176	.151	.136	.122	.087	.079	.071	.028	.025	.023	
2.0	.251	.207	.170	.215	.178	.147	.147	.123	.102	.085	.072	.060	.027	.023	.020	
3.0	.243	.190	.147	.208	.164	.128	.143	.114	.089	.083	.066	.053	.027	.022	.017	
4.0	.235	.177	.132	.202	.153	.115	.139	.106	.081	.080	.062	.048	.026	.020	.016	
5.0	.228	.167	.122	.195	.144	.106	.135	.101	.075	.078	.059	.044	.025	.019	.015	
6.0	.220	.159	.114	.189	.137	.100	.131	.096	.070	.076	.057	.042	.024	.018	.014	
7.0	.213	.152	.109	.183	.132	.095	.127	.092	.067	.074	.054	.040	.024	.018	.013	
8.0	.207	.146	.105	.178	.127	.091	.123	.089	.065	.072	.053	.039	.023	.017	.013	
9.0	.200	.141	.102	.173	.123	.089	.120	.086	.063	.070	.051	.037	.023	.017	.012	
10.0	.195	.137	.099	.168	.119	.086	.116	.084	.061	.068	.050	.037	.022	.016	.012	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Operators:Ben
 Test Date:2020-07-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:48%
 Test Distance:2.490m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.0V I:0.1131A P:25.74W PF:0.9485 Lamp Flux:3683.99x1 lm											
NAME: LED Tri-proof Light						TYPE:N/A		WEIGHT:N/A			
SPEC.:N/A						DIM.: N/A		SERIAL No.:N/A			
MFR.: Ulledlighting						SUR.:N/A		Shielding Angle:N/A			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		18.9	20.4	19.3	20.8	21.2	20.1	21.6	20.5	22.0	22.4
	3H	20.4	21.8	20.9	22.2	22.6	22.4	23.7	22.8	24.1	24.6
	4H	21.0	22.3	21.5	22.7	23.2	23.5	24.8	24.0	25.2	25.7
	6H	21.5	22.7	21.9	23.1	23.6	24.7	25.9	25.2	26.3	26.8
	8H	21.6	22.8	22.1	23.2	23.7	25.3	26.5	25.8	26.9	27.4
	12H	21.7	22.8	22.2	23.3	23.8	26.0	27.1	26.5	27.6	28.1
4H	2H	19.8	21.1	20.3	21.5	22.0	20.7	22.0	21.2	22.4	22.9
	3H	21.6	22.7	22.1	23.2	23.7	23.2	24.3	23.7	24.8	25.3
	4H	22.3	23.4	22.9	23.9	24.4	24.5	25.5	25.0	26.0	26.6
	6H	22.9	23.8	23.5	24.4	24.9	25.9	26.8	26.4	27.3	27.9
	8H	23.1	24.0	23.7	24.5	25.1	26.6	27.5	27.2	28.0	28.6
	12H	23.3	24.1	23.9	24.6	25.2	27.4	28.2	28.0	28.8	29.4
8H	4H	23.0	23.9	23.6	24.4	25.0	24.8	25.7	25.4	26.2	26.8
	6H	23.9	24.6	24.5	25.2	25.8	26.4	27.2	27.0	27.7	28.4
	8H	24.3	24.9	24.9	25.5	26.2	27.4	28.0	28.0	28.6	29.3
	12H	24.6	25.2	25.2	25.8	26.4	28.4	29.0	29.1	29.6	30.3
12H	4H	23.2	24.0	23.8	24.5	25.1	24.8	25.6	25.4	26.2	26.8
	6H	24.2	24.9	24.8	25.5	26.1	26.6	27.2	27.2	27.8	28.4
	8H	24.7	25.3	25.4	25.9	26.6	27.6	28.1	28.2	28.7	29.4
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.1					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.3					

CIE Pub.117 Corrected 3684 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.5)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.0DEG
Operators:Ben
Test Date:2020-07-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
Humidity:48%
Test Distance:2.490m [K=1.0000]
Remarks:


```

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
Humidity:48%
Test Distance:2.490m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

Test:U:240.0V I:0.1131A P:25.74W PF:0.9485 Lamp Flux:3683.99x1 lm		
NAME: LED Tri-proof Light	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.: Ulledlighting	SUR.:N/A	Shielding Angle:N/A

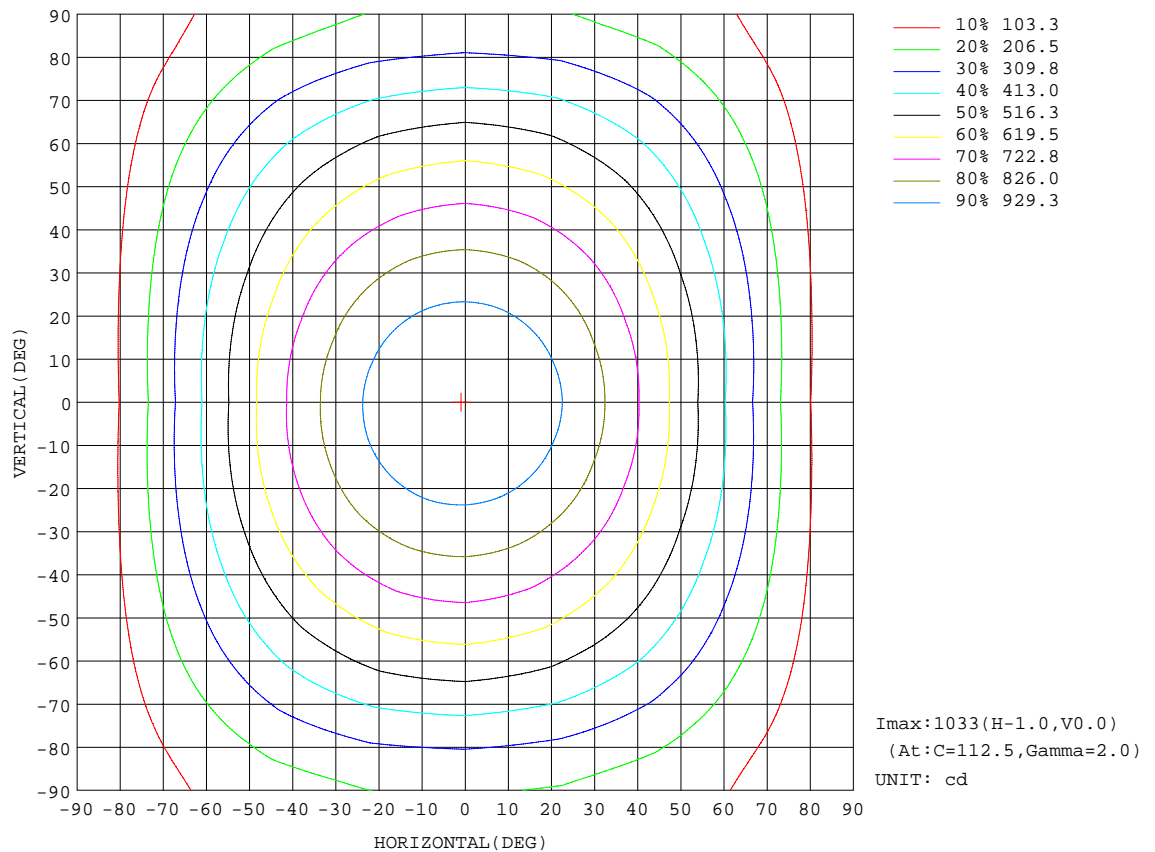


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.0DEG
Operators:Ben
Test Date:2020-07-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
Humidity:48%
Test Distance:2.490m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.0V I:0.1131A P:25.74W PF:0.9485 Lamp Flux:3683.99x1 lm		
NAME: LED Tri-proof Light	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.: Ulledlighting	SUR.:N/A	Shielding Angle:N/A

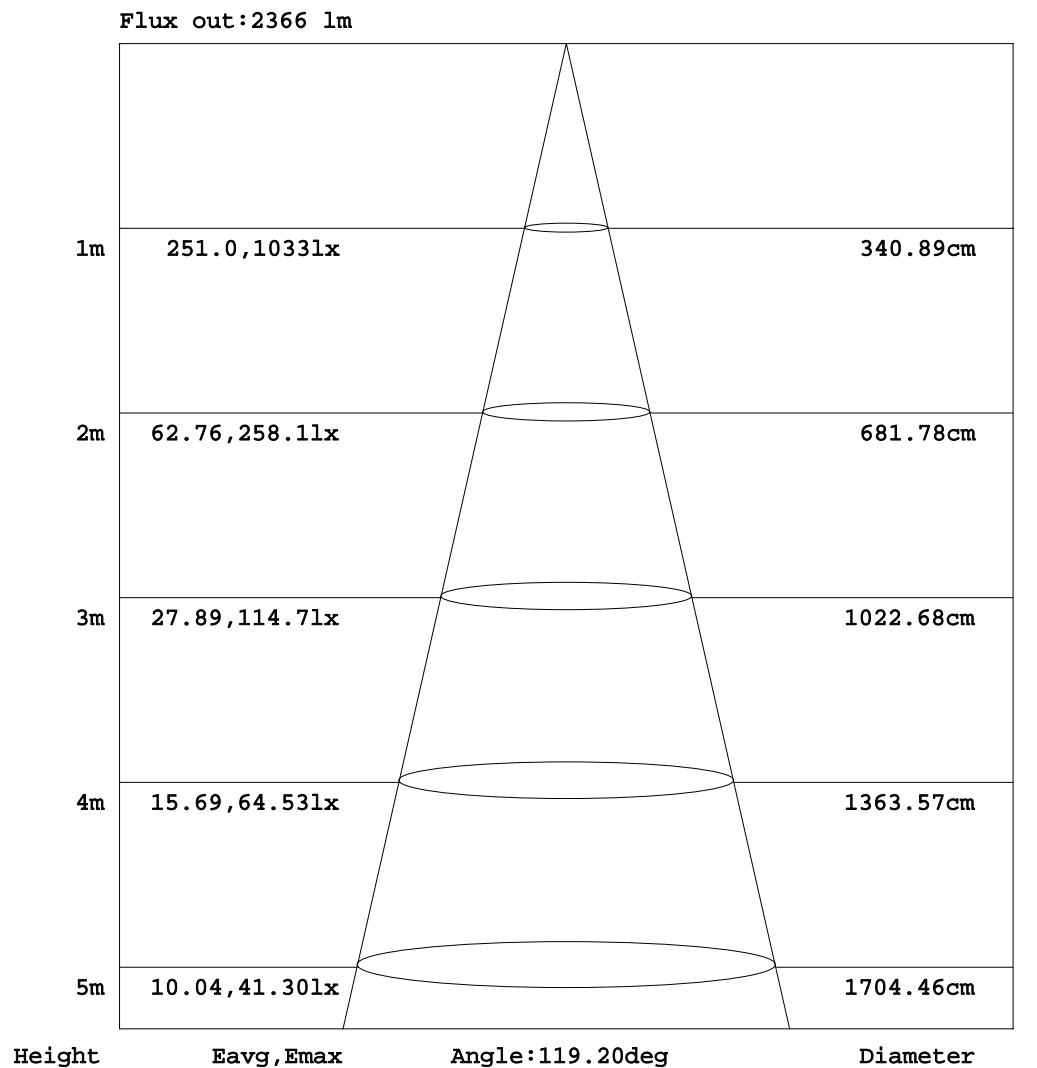


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.0DEG
 Operators: Ben
 Test Date: 2020-07-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity: 48%
 Test Distance: 2.490m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:240.0V I:0.1131A P:25.74W PF:0.9485 Lamp Flux:3683.99x1 lm		
NAME: LED Tri-proof Light	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.: Ulledlighting	SUR.:N/A	Shielding Angle:N/A

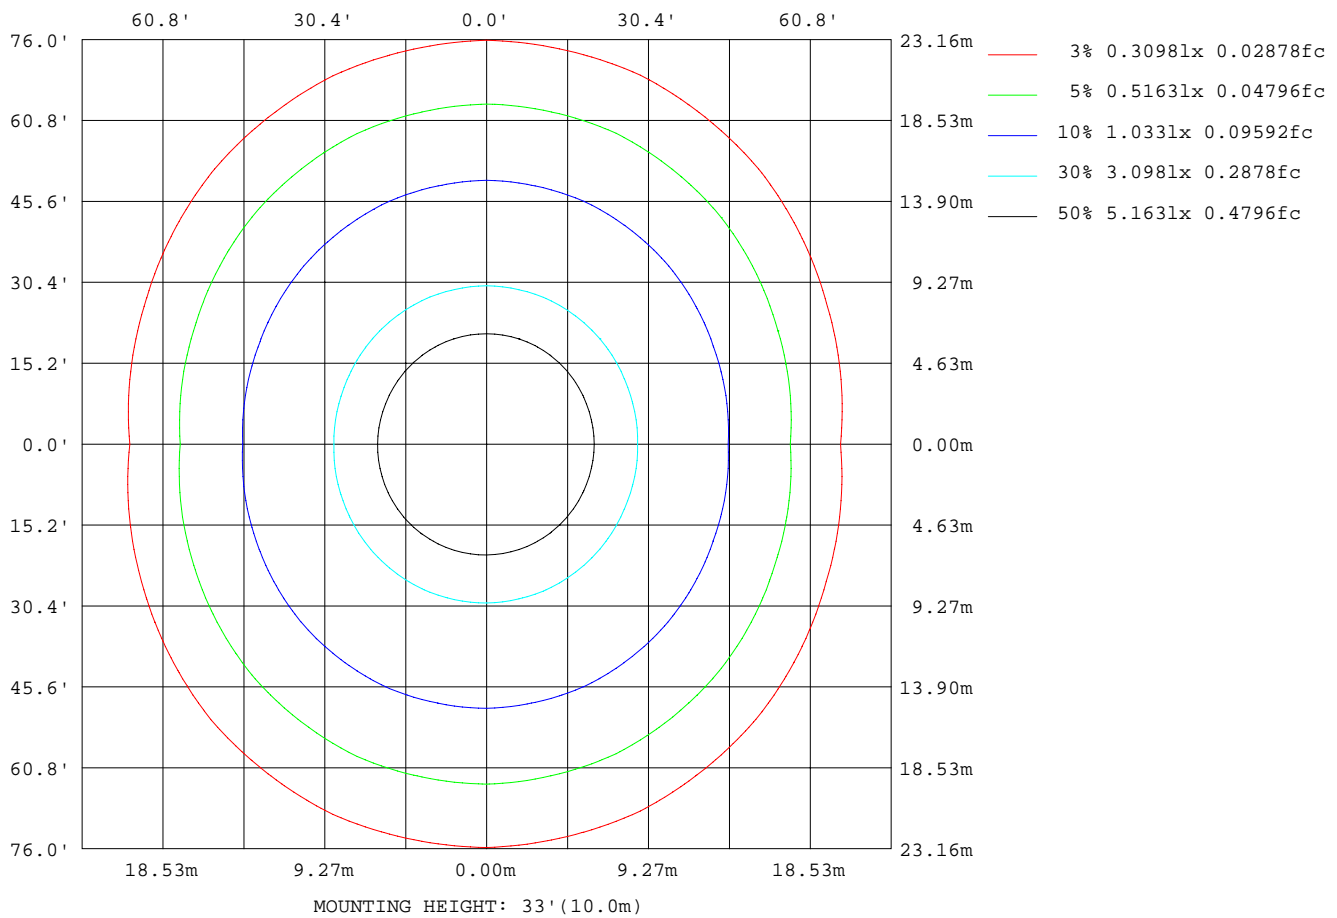

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.0DEG
Operators: Ben
Test Date: 2020-07-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.351
Humidity: 48%
Test Distance: 2.490m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.0V I:0.1131A P:25.74W PF:0.9485 Lamp Flux:3683.99x1 lm		
NAME: LED Tri-proof Light	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.: Ulledlighting	SUR.:N/A	Shielding Angle:N/A


AvgL	cd/m2
L_0~180(65)av	6722
L_0~180(75)av	5769
L_0~180(85)av	4534
L_90~270(65)av	10145
L_90~270(75)av	12386
L_90~270(85)av	25028
L_45(65)av	8948
L_45(75)av	10342
L_45(85)av	19138

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Operators:Ben
 Test Date:2020-07-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:48%
 Test Distance:2.490m [K=1.0000]
 Remarks:

Planar Illuminance Curve

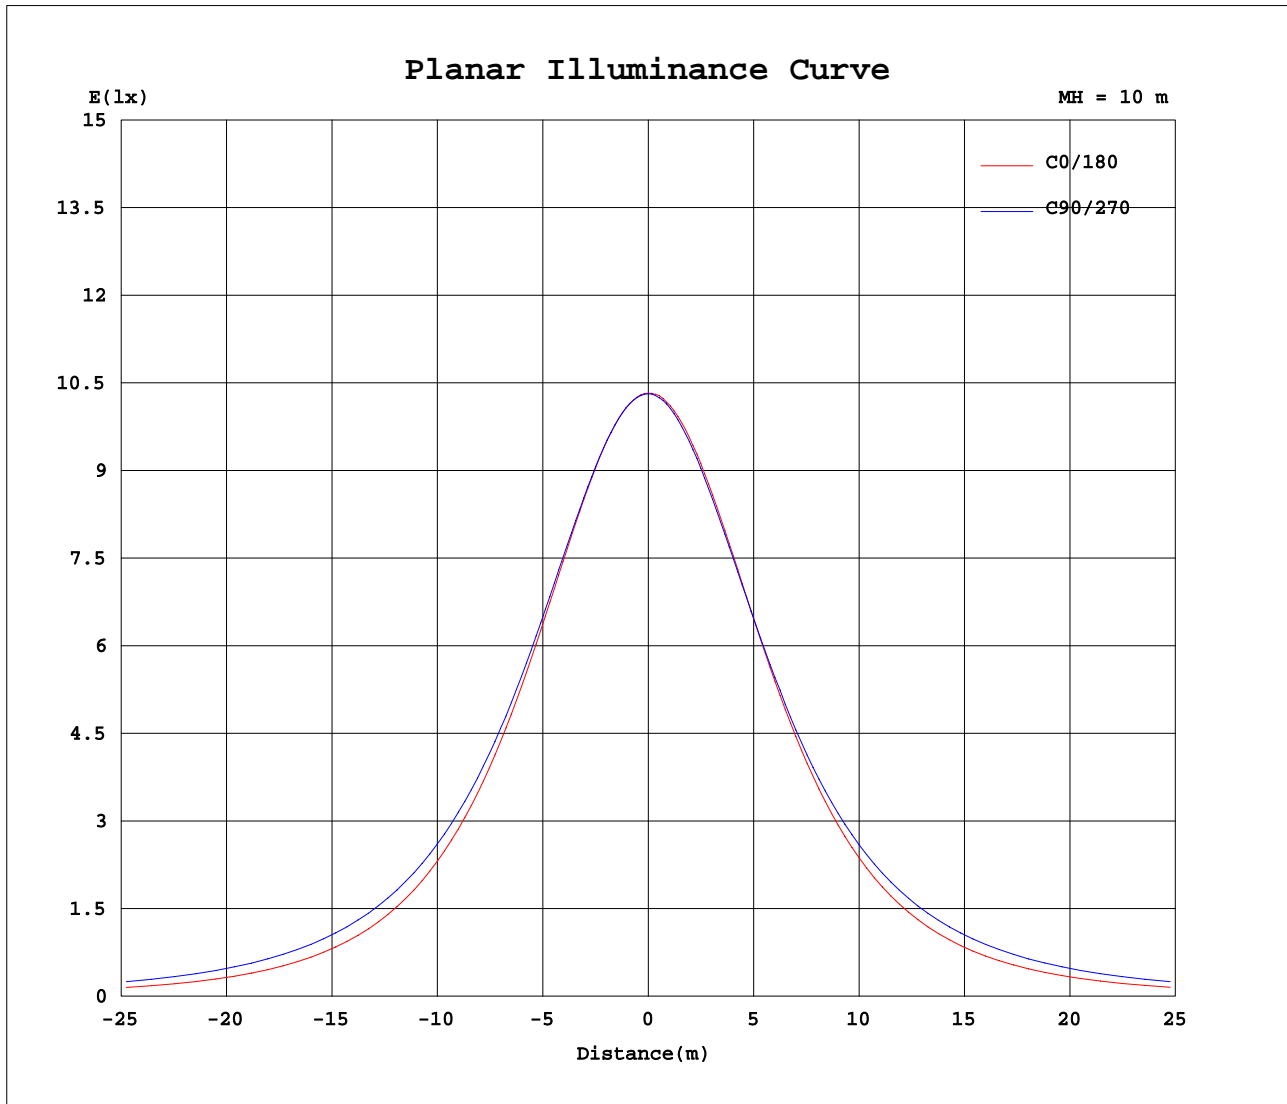

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.0DEG
Operators: Ben
Test Date: 2020-07-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.351
Humidity: 48%
Test Distance: 2.490m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.0V I:0.1131A P:25.74W PF:0.9485 Lamp Flux:3683.99x1 lm																	
NAME: LED Tri-proof Light									TYPE:N/A						WEIGHT:N/A		
SPEC.:N/A									DIM.: N/A						SERIAL No.:N/A		
MFR.: Ulledlighting									SUR.:N/A						Shielding Angle:N/A		

Table--1

UNIT: cd

C(DEC)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
γ (DEC)	0	1032	1032	1032	1032	1032	1032	1032	1032	1032	1032	1032	1032	1032	1032	1032			
5	1026	1026	1025	1026	1027	1028	1028	1028	1028	1027	1027	1027	1027	1026	1025	1026			
10	1010	1010	1009	1010	1011	1013	1014	1015	1015	1014	1011	1010	1009	1008	1008	1009			
15	985	983	983	985	987	989	991	993	992	989	987	986	985	983	983	983			
20	950	949	950	953	957	958	959	960	960	957	954	953	953	951	949	948			
25	906	905	909	915	920	922	922	921	918	915	914	916	917	914	909	905			
30	853	855	863	872	879	882	878	872	867	865	869	874	875	872	863	854			
35	793	797	812	826	835	836	828	817	808	809	818	827	830	825	812	798			
40	726	735	756	776	787	786	773	755	742	747	763	777	783	775	757	735			
45	654	668	697	724	739	735	715	690	670	680	705	725	734	724	700	670			
50	578	599	636	670	686	681	655	620	593	611	644	672	683	671	640	600			
55	498	528	574	614	632	625	593	549	513	539	582	617	630	616	579	530			
60	417	455	511	555	575	566	530	475	430	466	518	560	575	560	516	458			
65	336	382	446	493	514	505	464	401	346	392	453	498	515	500	452	387			
70	255	310	379	428	449	441	397	327	263	318	387	434	453	438	388	315			
75	177	239	312	362	382	374	330	254	182	246	319	369	387	373	323	245			
80	104	172	248	297	316	308	264	186	106	178	255	304	323	310	260	179			
85	48.0	116	192	240	258	249	206	127	46.8	121	199	247	265	253	204	123			
90	21.5	83.7	156	200	216	206	165	90.1	22.1	87.3	163	208	225	211	165	87.3			
95	18.8	67.4	133	173	188	178	141	72.8	19.2	70.7	140	181	196	183	142	70.9			
100	16.0	53.3	113	150	163	154	120	58.3	16.3	56.4	119	158	171	159	121	57.2			
105	11.2	41.4	95.4	129	142	133	101	45.6	12.7	44.2	100	137	149	138	102	45.4			
110	7.82	31.2	79.6	111	123	114	84.4	35.0	8.00	33.5	83.9	117	129	118	85.5	35.0			
115	6.43	22.2	65.4	95.0	106	97.7	69.7	25.6	6.45	24.1	69.3	99.8	110	101	70.8	25.8			
120	5.13	14.3	52.4	79.9	90.2	82.3	56.2	17.5	5.13	15.8	55.9	84.1	94.0	84.9	57.4	17.9			
125	4.08	7.96	40.4	66.0	75.6	68.1	43.7	10.6	4.00	9.07	43.7	69.4	78.7	70.3	45.1	11.1			
130	3.20	4.04	29.7	52.9	61.8	54.8	32.6	5.86	3.04	4.39	32.4	55.8	64.2	56.6	34.0	5.82			
135	2.43	2.78	20.1	40.3	48.1	41.8	22.6	3.56	2.27	2.34	22.1	42.7	50.5	43.7	23.9	2.90			
140	2.02	2.44	12.1	28.9	35.7	30.1	14.0	2.74	1.69	1.64	13.1	30.5	37.5	32.0	15.5	1.86			
145	1.98	2.40	6.12	18.5	24.1	19.5	7.42	2.52	1.37	1.29	5.32	18.8	25.5	21.6	9.13	1.50			
150	2.08	2.55	3.53	9.85	13.8	10.5	3.96	2.60	1.34	1.16	1.98	8.72	14.6	12.7	4.66	1.47			
155	2.23	2.70	3.24	4.57	6.23	5.09	3.27	2.69	1.44	1.17	1.64	2.78	5.77	5.53	2.49	1.57			
160	2.35	2.77	3.16	3.58	3.77	3.56	3.13	2.68	1.49	1.37	1.40	1.87	2.27	2.39	1.98	1.61			
165	2.36	2.73	2.97	3.26	3.33	3.21	2.86	2.54	1.54	1.51	1.29	1.61	1.89	1.96	1.83	1.56			
170	2.33	2.59	2.76	2.96	2.98	2.88	2.50	2.40	1.61	1.61	1.45	1.41	1.68	1.71	1.66	1.52			
175	2.24	2.31	2.46	2.60	2.63	2.38	2.33	2.27	1.83	1.83	1.76	1.69	1.60	1.70	1.72	1.76			
180	2.03	2.02	2.05	2.07	1.85	2.01	2.09	2.06	2.04	2.04	2.03	2.04	2.07	1.96	2.00	2.05			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.0DEG
Operators:Ben
Test Date:2020-07-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
Humidity:48%
Test Distance:2.490m [K=1.0000]
Remarks: