

# LED PANEL LIGHT

# 295\*1195\*9mm/595\*595\*9mm



## **Features:**

Super slim and efficient design high light efficient and energy saving Special heat treatment & Long life-span Environmental friendly

#### Certificates





SHENZHEN ULLEDLIGHTING PHOTOELECTRICITY CO.,LTD 2110,Building A,Yonghuayuan,No.6 Baotian 2nd Road,Chentian Community, Xixiang Street,Baoan District,Shenzhen

+86 0755 23305240 +86 137 5111 4208



## **A:Technical Specification**

ltem	Lumen	Size(mm)	Lumen Efficiency	Voltage	Beam Angle	PF	CRI	Material
ULPL30120-22W	3080lm	 295*1195*9mm 	1401m/W	AC100-240V 50/60Hz	120°	> 0.9	Ra≥80	AL+PC
ULPL30120-24W	3360lm							
ULPL30120-27W	3780lm							
ULPL30120-30W	4200lm							
ULPL30120-36W	5040lm							
ULPL30120-40W	5600lm							
ULPL30120-48W	6720lm							

# **B:Technical Specification**

ltem	Lumen	Size(mm)	Lumen Efficiency	Voltage	Beam Angle	PF	CRI	Material
ULPL6060-22W	3080lm	-						
ULPL6060-24W	3360lm							
ULPL6060-27W	3780lm	595*595*9mm	1401m/W	AC100-240V 50/60Hz	120°	> 0.9	Ra≥80	AL+PC
ULPL6060-30W	4200lm							
ULPL6060-36W	5040lm							
ULPL6060-40W	5600lm							
ULPL6060-48W	6720lm							

## Application

This product is suitable for office, hall, family, hotel, conference room, factory or office, commercial use, residential or public facilities, school, hospital lights.



+86 0755 23305240 +86 137 5111 4208




## Dimension (Unit:mm)

#### Notes

1.All dimension units are millimeters

2.All dimension tolerance is  $\pm$  0. 5mm unless otherwise noted

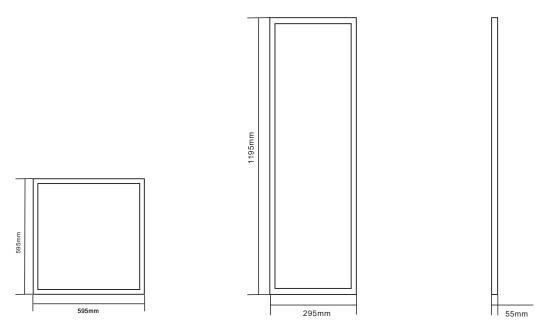

## Safety / Information

- 1. Please make sure cut off the power before installation.
- 2. Please take care of water, electric shock and vibration.
- 3. Please use the panel with standard working voltage, any other voltage is not allowed;
- 4.Indoor use only;
- 5. Please read this manual carefully before using.



+86 0755 23305240 +86 137 5111 4208



# **Packing information**

Model NO:	Package	Size (mm)	QTY/PCS	Carton GW (KG)	
ULPL6060	Box size	670*670*245	6	15.6	
ULPL30120	Box size	1260*355*170	6	14.2	



SHENZHEN ULLEDLIGHTING PHOTOELECTRICITY CO.,LTD 2110,Building A,Yonghuayuan,No.6 Baotian 2nd Road,Chentian Community, Xixiang Street,Baoan District,Shenzhen

+86 0755 23305240 +86 137 5111 4208



# Installation instruction

## 1.Imbedding Installation:

### Method.1

- 1. Take all accessories out of the bag, using spring accessories and lug with matched screws.
- 2. Fix lug with two screws as shown then fix spring accessories with screws in the holes of lug.
- 3.Assemble the remaining three springs as the same method then insert panel into ceiling.

Finish the installation.



#### Method.2

1.Cut an open hole on the ceiling where the panel light will be installed.


2.Imbeded the panel light inner the open hole.

3. Connecting the power cable to commercial power.

#### 2.Surface Mounting Installation:

1.Assemble one "frame and two "b" frames with screws,one side isn't  $s\,\text{ealed}$  as shown (with the direction of the screw holes up) G

2.Fix the frame assembled in "1" on the ceiling,insert panel along two "b" frames, fix the remaining frame by screws,finish the installation.

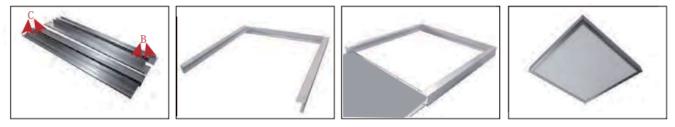

#### 2.Suspending Installation:

1. Take all accessories out of the bag, using lug with matched screews together.

2.Screw off the bolt of the hanging rope.

3.Fix lug with two screws as shown then hang buckle buckled into the holes of lug (as the location figure out by red circle).

4. When four hanging buckles are buttoned, adjusting the hanging rope, making the panel lights in a Harizontal state.

5. Fix hanging rope with matched bolt in "1" to the ceiling, finish the installation.

