

Tri-proof Light-B

0.6m 18W / 1.2m 24W 36W 40W / 1.5m 50W

CCT Changeable/Sensor/Emergency Option



Certificates



IPART




VEET



Application



Dimension (Unit: mm)

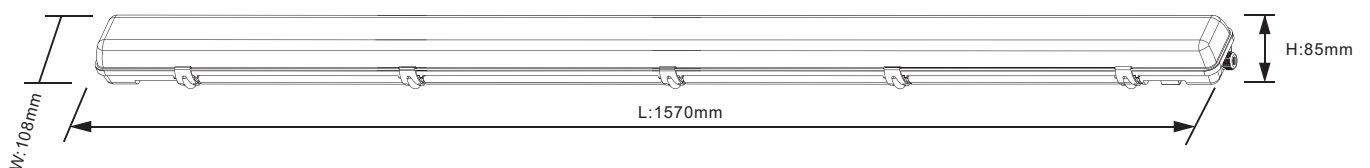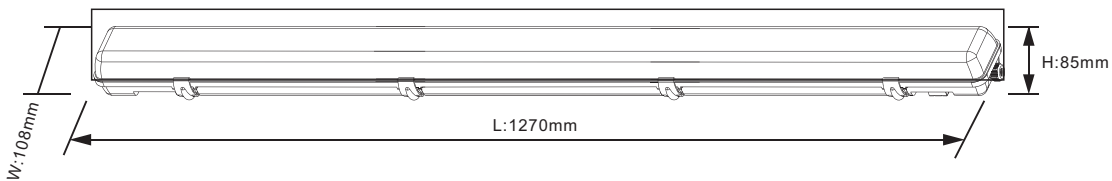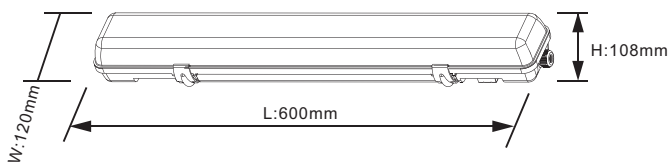

Technical Specification

Item	UL-TRI-18WB	UL-TRI-24WB	UL-TRI-36WB	UL-TRI-40WB	UL-TRI-50WB
Lumen	2520lm	3360lm	5040lm	5600lm	7000lm
Size(mm)	600×120×108mm	1270×108×85mm	1270×108×85mm	1270×108×85mm	1570×108×85mm
Voltage	AC220-240~50/60Hz				
Lumen Efficiency	140lm/W				
LED Type	SMD 2835				
CCT	2700K-6500K				
Beam Angle	120°				
PF	>0.9				
CRI	Ra>80				
IP Rank	Ip65				
Material	AL+PC				

Transport packing

Item	UL-TRI-18WB	UL-TRI-36WB	UL-TRI-50WB
Box Size	63.2*24.5*24.5	133*24.4*29	163*24.4*29
G.W.	6.5kg	12.6kg	16.4kg
QTY/Box	9pcs	6pcs	6pcs